


Jack Panels for Miniature Thermocouple Connectors

Design Features:

- * Designed to be space saving.
- * Complements modern miniature instrumentation.
- * Jack bodies are ANSI color coded, glass-filled nylon with a temperature rating of 350°F (177°C) continuous and 400°F (204°C) intermittent.
- * Panels are manufactured of rugged .090" thick aluminum.
- * Brushed and anodized finishes are available at an additional cost. Consult TEMPCO with your requirements.
- * Panels are supplied unassembled for ease of wiring—all hardware necessary to assemble is included.

Standard Sizes

Part Number	Number of Rows	Panel Height H x L (in)	Number of Jacks	Cutout Size H x L (in)
JP(+)00013	1	2 ²¹ / ₃₂ x 3 ⁵ / ₈	6	1 ⁹ / ₃₂ x 3 ³ / ₃₂
JP(+)00014	2	4 ³ / ₁₆ x 3 ⁵ / ₈	12	2 ¹⁵ / ₁₆ x 3 ³ / ₃₂
JP(+)00015	3	5 ³¹ / ₃₂ x 3 ⁵ / ₈	18	4 ¹⁹ / ₃₂ x 3 ³ / ₃₂
JP(+)00016	4	7 ⁷ / ₈ x 3 ⁵ / ₈	24	6 ¹ / ₄ x 3 ³ / ₃₂
JP(+)00017	1	2 ²¹ / ₃₂ x 6 ⁵ / ₈	12	1 ⁹ / ₃₂ x 6 ¹ / ₁₆
JP(+)00018	2	4 ³ / ₁₆ x 6 ⁵ / ₈	24	2 ¹⁵ / ₁₆ x 6 ¹ / ₁₆
JP(+)00019	3	5 ³¹ / ₃₂ x 6 ⁵ / ₈	36	4 ¹⁹ / ₃₂ x 6 ¹ / ₁₆
JP(+)00020	4	7 ⁷ / ₈ x 6 ⁵ / ₈	48	6 ¹ / ₄ x 6 ¹ / ₁₆

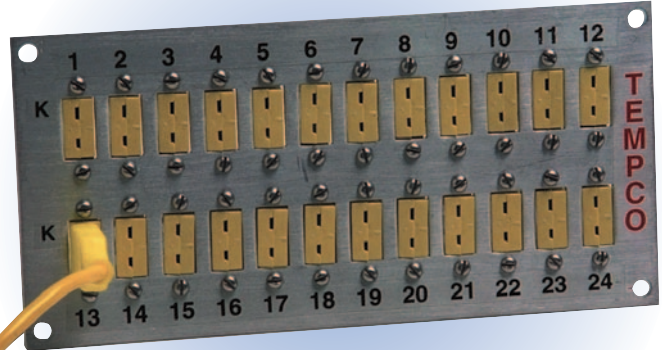

Note: Mounting Hole Spacing: 3/16" in from each side to center of 13/64" hole (for #10 screw)

- ✦ Insert calibration code (J, K, T, E, R, S, U) in Part Number, "U" is designated for RTDs and type B thermocouples

Ordering Information

Catalog Jack Panels

Order by Part Number

Custom Engineered/Manufactured Jack Panels

For sizes and styles not listed, TEMPCO will design and manufacture a Jack Panel to meet your specifications. **Standard lead time is 2 weeks.**

Please Specify the following:

- Overall Dimensions
- Type of Jack (Standard or Miniature)
- Number of Jacks (Circuits)
- Number of Rows
- Calibration

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov.

View Product Inventory @ www.tempco.com