
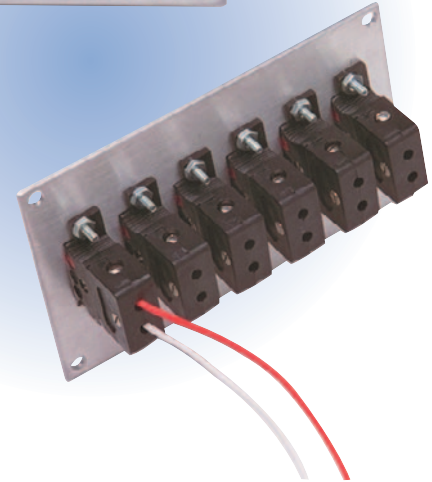


Jack Panels

Jack Panels — Jab-In Style Termination

Design Features:

- * Accepts Standard Plugs.
- * Jacks will accept up to 14-gauge wire.
- * Jack bodies are ANSI color coded, glass-filled nylon with a temperature rating of 350°F (177°C) continuous and 400°F (204°C) intermittent.
- * Panels are manufactured of rugged .090" thick aluminum.
- * Brushed and anodized finishes are available at an additional cost. Consult TEMPCO with your requirements.
- * Jack rows are placed further apart than standard Jack Panels for ease of termination.
- * Panels are supplied unassembled for ease of wiring — all hardware necessary to assemble is included.

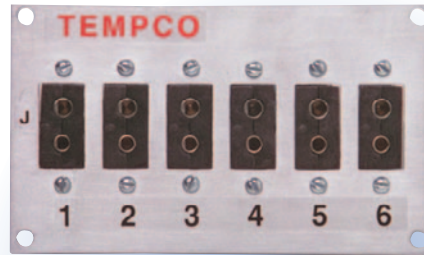

Standard Sizes

| Part Number | Number of Rows | Panel Height H x L (in) | Number of Jacks | Cutout Size H x L (in) |
|-------------|----------------|-------------------------------------|-----------------|--|
| JP(+)00037 | 1 | 3½ x 5½ | 6 | 1¾ x 4 ²¹ / ₃₂ |
| JP(+)00038 | 2 | 5 ³ / ₁₆ x 5½ | 12 | 3 ³ / ₁₆ x 4 ²¹ / ₃₂ |
| JP(+)00039 | 3 | 8 ¹ / ₈ x 5½ | 18 | 6 ¹ / ₂ x 4 ²¹ / ₃₂ |
| JP(+)00040 | 1 | 3½ x 10 | 12 | 1¾ x 9¼ |
| JP(+)00041 | 2 | 5 ³ / ₁₆ x 10 | 24 | 3 ³ / ₁₆ x 9¼ |
| JP(+)00042 | 3 | 8 ¹ / ₈ x 10 | 36 | 6 ¹ / ₂ x 9¼ |

- * Insert calibration code (J, K, T, E, R, S, U) in Part Number, "U" is designated for RTDs and type B thermocouples



Note: Mounting Hole Spacing: 3/16" in from each side to center of 13/64" hole (for #10 screw).

To help ease installation:
Optional Ratchet Screwdriver

Part Number:
TUL-101-101



Ordering Information

Catalog Jack Panels
Order by Part Number

Custom Engineered/Manufactured Jack Panels

For sizes and styles not listed, TEMPCO will design and manufacture a Jack Panel to meet your specifications. **Standard lead time is 2 weeks.**

Please Specify the following:

- Overall Dimensions
- Type of Jack (Standard or Miniature)
- Number of Jacks (Circuits)
- Number of Rows
- Calibration

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov.