

Improve your injection molding output...switch to Tempco's MX Hot Runner Temperature Control System



### Mainframes

The configurations illustrated below provide a wide selection of zone capacities to suit almost any control application. The 5, 8 and 12 zone frames use individual frame sections. The 16 through 48 zone frames use 2, 3 or 4 frame sections rigidly fastened together into one prewired integral unit which requires only one main AC power input connection.



### Ordering Information

The following mainframes are set up for 15 Amp per zone IMP or RMB control modules, 240 VAC 3-phase 60 Hz power input. Other power configurations are available; consult Tempco for more information.

**Standard lead time is 3 to 4 weeks.**


Description	Standard
5-Zone	TKA21005
8-Zone	TKA21008
12-Zone	TKA21012
16-Zone	TKA21016
20-Zone	TKA21020
24-Zone	TKA21024
28-Zone	TKA21028
32-Zone	TKA21032
36-Zone	TKA21036
40-Zone	TKA21040
44-Zone	TKA21044
48-Zone	TKA21048



**Note:** To order a complete Hot Runner Control System the following must be ordered separately:

- Control Modules
- Mainframe
- Power Mold Cable
- Thermocouple Mold Cable
- Mold Wiring Junction Box (if required)

### Mainframe Zone Configurations

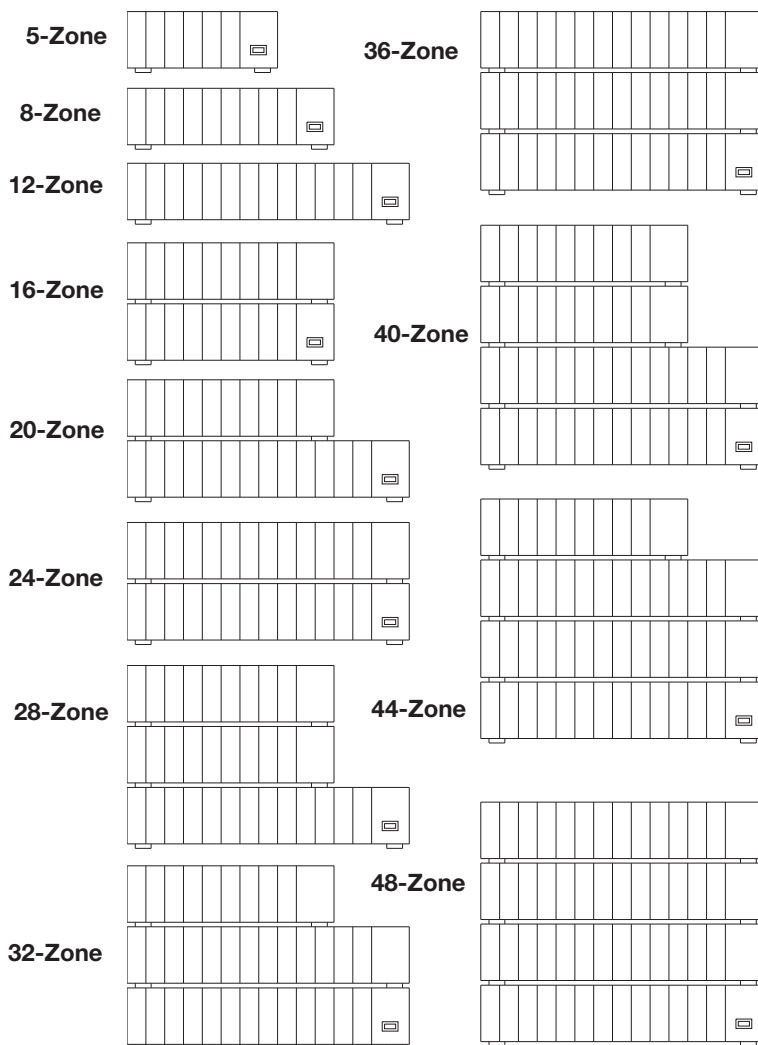

**⚠ WARNING:** Cancer and Reproductive Harm - [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).